CHIEFTRAILER.COM





GENERAL CARGO GROUP

GENERAL CARGO SEMI TRAILER



TECHNICAL SPECIFICATION

GENERAL CARGO SEMI TRAILER



GENERAL CARGO GROUP

FIFTH WHEEL HEIGHT	1350 mm							
TOTAL LENGTH	12.800 mm							
TOTAL WIDTH	2600 mm							
SEMI-TRAILER SUITABLE FOR	6x4 Truck Tractor							
CHASSIS	The Trailer has to lay on a special steel profile which connects the saddles. On the special profile proper reinforcements have to be located for connection points of the moving gears Material is 5T52 steel plate according the dimensions of International Standards							
CARGO DECK	The flat bed has to be covered with chequered plate $(3+1.4 \text{mm thickness})$, reinforced with crossbeam's chassis U profiles.							
FRONT WALL, SIDE COVERS AND RIVER COVER	Fixed type height of front wall be bolt and it has to be from 2,5 mm thickness channeled steel plate, Side Covers made from 5 PCS. Open able type with one piece 1000 mm height and bolted. 300mm additional steel. Rear Covers with open able operation.							
ROOF GRILL TYPE	Portable steel profile assembled of the top of the side doors. With an option to be disassembled during loading of Containers							
CANVAS	Monad type of canvas pleased on the top of the front wall.							
KING PIN	3½ king — pin detachable from below made by SAE standards 8 bolt type							
AXLES	3 x 12000 kg carrying capacity Reis brand							
DISTANCE BETWEEN AXLES	1320 mm							
BRAKE AND SUSPENSION SYSTEM	AIR Suspension, Drum Brake System, Wabco ABS Brake System							
LANDING GEARS	Double Speed, 24000 kg carrying capacity, SERiN brand two speed mechanical Landing Gears							
REAR BUMPER	Suitable 70/221 / AT-version of the rear bumper							
WHEEL CHOCK	Carriers with 1 unit wheel chock							
TIRES & WHEELS	12+1 PCS 315 80R 22,5 Goodyear-Pirelli-Bridgestone							
MUDGUARD	2 pcs galvanized steel mudguards with plastic edges							
SPARE TIRE CARRIER	Double tire piece tire carrier							
BOX	1 unit Plastic Tool Box, 1 unit fire distinguisher plastic carrier's box							
PAINT	PaintMaterial cleaned and grit (metal) material is blasting, 2 Floor Epoxyprimers are made and the desired color, In the final layer is painted with 2 coats acrylic paint							
ELECTRICAL EQUIPMENT AND LIGHTING	There are amber-colored lights in the side by 3 units, Park at the rear lamps, License plate lamp, Reflector triangles, Electrical system; Flame proof electrical system, 2 X 7-pin electrical socket							
ACCESSORIES	Hub key, Axles Bolt Nut key, Tool box keys							
SHIPPING TYPE	Type 3 units will be one set							
OPTIONALS	Axles: BPW or SAF brand. Landing Gears: SAF or JOST Brand							














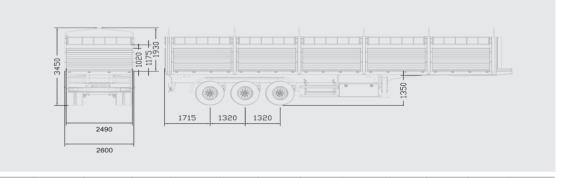

KASA HACMİ (m3) & KASA TİPİ	PALET Sayisi (Euro Palet)	5. TEKER YÜKSEKLİĞİ (mm)	ARAÇ ÖN KING PIN ARASI (mm)	AKS KING PIN MERKEZ ARALIĞI (mm)	ŞASİ Merkezi	LASTİK İZ Genişliği	İÇ NET Genişlik	DIŞ NET Yükseklik	İÇ NET Uzunluk	DIŞ NET Genişlik	DIŞ NET Uzunluk	İÇ NET YÜKSEKLİK
MANDALLI	(800x1200)	В	C	D	E	F	G	Н	J	K	L	N
27	34	1200	1700	6575	1300	2056	2480	2785	13600	2550	13700	770







SERIN OTOMOTIV A.Ş.

CHIEFTRAILER

Büyükkayacık Mah. Konya OSB Evrenköy Cad. 3 Nolu Sokak No:12 42100 Selçuklu / Konya T| +90.332 239 06 10 | F| +90.332 239 06 13 | satis@reistreyler.com.tr













